

MODEL	JWR30GF	
Prime Power(50Hz)	30 KW	37.5 KVA
Standby Power(50Hz)	33 KW	41.25 KVA

Standard Features

General Features:

- ◆ Engine: Weifang Ricardo ZH4102D
- ◆ Radiator 40°C max, fans are driven by belt, with safety guard
- ◆ 12V charge alternator
- ◆ Alternator: single bearing alternator IP23, insulation class H/H
- ◆ Absorber
- ◆ Dry type air filter, fuel filter, oil filter
- ◆ Main line circuit breaker
- ◆ Standard control panel
- ◆ Batteries, rack and cable
- ◆ Ripple flex exhaust pipe, exhaust siphon, flange, muffler
- ◆ User manual



Generator Ratings

Voltage(V)		Hz	Phase	P.F (cos ϕ)	Prime Amps (A)	Prime Ratings (KW/KVA)	
440	254	50	3	0.8	49.21	30	37.5
415	240	50	3	0.8	52.17	30	37.5
400	230	50	3	0.8	54.13	30	37.5
380	220	50	3	0.8	56.98	30	37.5

● Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820-97 (eqv ISO8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

● Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

Standard Features

Weifang Junwei Machinery Co.,Ltd provides a full line of brand new and high quality products. Each and every generator is strictly factory tested. Warranty is according to our standard conditions: ① 12 months, counted on the day Huaquan sold to the first buyer; ② One year after installation; ③ 1000 running hours (accumulated); subject to the earlier one. Service and parts are available from Junwei Machinery or distributors in your location.

Ricardo Generator Set

JWR30GF

Engine Data

Manufacturer / Model: Ricardo ZH4102D, 4-stroke

Air Intake System: Naturally intake

Type: Four-stroke、Direct injection、4 Cylinders、Wet cylinder、Water cooling

Cylinder Type: Water-cooled cylinder liner

Start mode: Electric starting

Cooling mode: Closed water cooling

Displacement: 3.6l

Bore and Stroke: 102*115(mm)

Compression Ratio: 19.0:1

Rated RPM: 1500rpm

Max. Standby Power: 36KW

Governor Type: Electronic / Mechanical

Exhaust system

Max Back Pressure: 10kPa

Air Intake System

Max Intake Restriction: 5kPa

Fuel System

100%(Prime Power) Load: 238g/kw.h

Oil System

Total Oil Capacity: 7L

Cooling System

Total Coolant Capacity: 15L

Alternator Specification

Compliance with GB755, BS5000, VDE0530, NEMAMG1-22, IED34-1, CSA22.2 and AS1359 standards.

Alternator Data

Manufacturer: WEIFANG JUNWEI MACHINERY CO., LTD

Number of Phase: 3

Connecting Type: 3 phase and 4 wires, "Y" type connecting

Number of bearing: 1

Ricardo Generator Set

JWR30GF

Power factor: 0.8

Protection grade: IP23 option, upon request

Altitude: $\leq 1000\text{m}$

Exciter type: Brushless, self-exciting

Insulation class: H

Telephone influence factor (TIF): ≤ 50

THF: $\leq 2\%$

Alternator Capacity: 37.5KVA

Alternator Efficiencies: 85%

Air Cooling Flow: 0.09m³/s

Adjusting rate of stable voltage: $\pm 0.5\%$

Generating Set Data

Voltage Regulation: $\geq \pm 5\%$

Voltage Regulation, Stead State: $\leq \pm 1\%$

Sudden Voltage Warp: $\leq +20\%$

Sudden Voltage Warp: $\leq -15\%$

Voltage Stable Time: $\leq 5\text{S}$

Voltage unbalance: $\leq 1\%$

Frequency Regulation, Stead State: $\leq 5\%$

Frequency Waving: $\leq 0.5\%$

Sudden Frequency Warp: $\leq +10\%$

Transient frequency deviation: $\leq -7\%$

Frequency Recovery Time: $\leq 3\text{S}$

Standard Features

◆ Standard Auto Control System

◆ MCCB

◆ Special tool

◆ Starting batteries

◆ Battery switch

◆ Oil Drain Valve

◆ Exhaust System

◆ Shock pad

◆ Documents

Options

Engine: ◇ Engine Heater

◇ Battery Charger

◇ Air preheater

Alternator: ◇ Alternator Heater

◇ PMG

Electrical System: ◇ Remote Control Panel

◇ Automatic Transfer Switch

◇ Paralleling System

Type: ◇ Rainproof Type

◇ Soundproof Type

◇ Trailer Type


Other: ◇ Spare Parts

◇ Daily Fuel Tank

Ricardo Generator Set

JWR30GF

Dimension & Weight

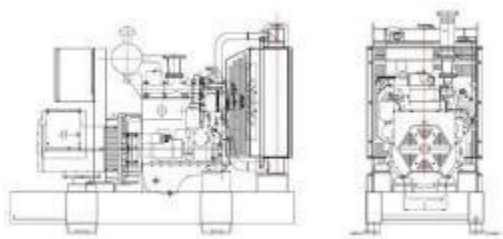

Open Type

Overall Size: 1600(mm) × 700 (mm) × 1100 (mm)

Weight: 650kg

Soundproof Type

Overall Size: 2300 (mm) × 900 (mm) × 1500 (mm)

Weight: 920kg

Standard Control Panel



Weifang Junwei Machinery Co., Ltd uses micro processing technique integrating digital, intelligent and network techniques which can carry out functions including auto start/stop, data measure, alarming. The controller uses Smartgen LCD display, optional Chinese and English/ Russian/ Spanish display interface with operation easy and reliable. It can be widely used in all types of generator automatic control system for compact structure, advanced circuits, simple connections and high reliability.

Typical Projects

